


Details of Side Entry Manholes With 1050 & 1200 dia Shaft Sections

PD 56 Rev B

22/10/04

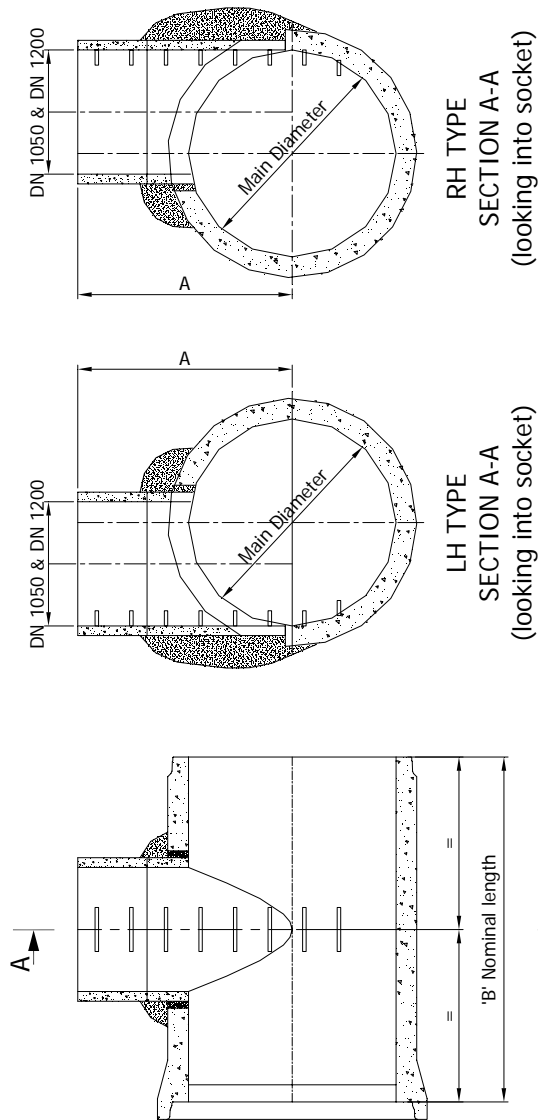

Pipe Lengths 'B'
 DN1400 to DN1800 'B' = 2500
 DN2000 & DN2400 'B' = 2400
 DN2200 'B' = 2320

NOTES

1. For main pipe diameters 1400 'A' = 1050mm, for pipe diameters 1500 to 1800 'A' = 1300mm for pipe diameters 2000 and 2200 'A' = 1550mm and for 2400 diameter pipes 'A' = 1650mm.
2. Side entry manholes are available as left or right hand types and can be supplied without or without steps.
3. Side entry manholes are not designed as load bearing structures and should be encased in a suitable designed in-situ concrete surround.
4. Only sections of 1.0m, 0.5m and 0.25m depth should be used immediately above the chamber ring. The 0.25m section should only be used if a coverslab is to be installed immediately above.
5. These products are made from 'Kitemarked' products which comply with the relevant Standards.
 Pipes DN1600 and below BS EN 1916 & BS 5911-1
 Pipes DN1800 and above BS 5911-1
 Manholes BS EN 1917 & BS 5911-1

Right to Change: The specifications given in this document are believed to be correct but are not guaranteed. Stanton Bonna reserve the right to alter any specifications given in accordance with its policy of continuous product development. All rights reserved.

STANTON BONNA CONCRETE LTD, LITTLEWELL LANE, STANTON-BY-DALE, ILKESTON, DERBYS. DE7 4QW
 TEL: (0115) 944 1448 FAX: (0115) 944 1466 E-MAIL: sales@stanton-bonna.co.uk